



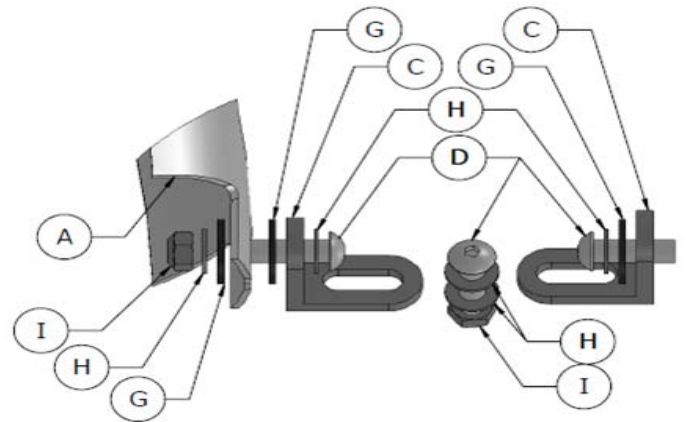

Big Cat HPV, LLC
 720 Business Park Blvd. Ste. 22
 Winter Garden, FL 34787

Rear Fender Set

PART NUMBER	PART NAME	QTY	COMMENTS
A	REAR FENDER	1	
B	WIRE FENDER STAYS	4	
C	REAR FENDER BRACKET	2	
D	M5 BUTTON HEAD BOLT	3	16mm LONG BUTTON HEAD SCREW
E	M5x16 SHCS	1	16mm LONG SOCKET HEAD SCREW
F	M5x12 SHCS	4	12mm LONG SOCKET HEAD SCREW
G	RUBBER WASHER	3	
H	M5 WASHER	5	
I	M5 HEX NUT	2	

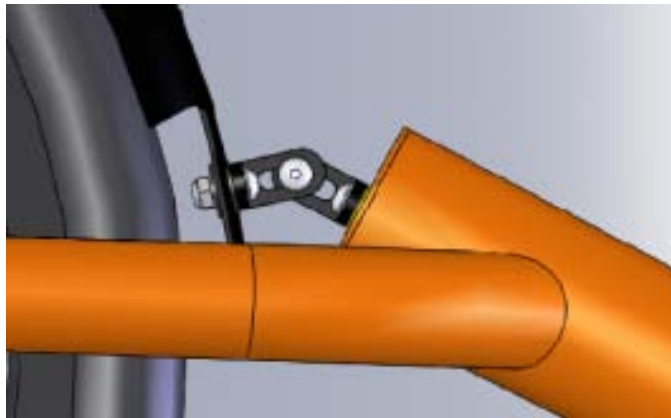

1. Assemble one rear fender bracket to the end of the mainframe as shown. (Parts 3,4,7,8)
2. Assemble the second rear fender bracket to the rear fender as shown. (Parts 1,3,4,7,8,9)
3. Using the M5X12 SHCS and M5 washers, bolt the 4 long wire fender stays provided with the fender into the holes in the top of the drop outs, two on each side. (Parts 2,6,8)
 *Use M5x16 SHCS if attaching the flag mount also. (Part 5)
4. Attach the fender stay clips to the fender and tighten the screws.
5. Insert fasteners to attach the two rear fender brackets to each other. (Parts 4,8,9)

