



Sherpa Rack Installation

Big Cat HPV. LLC
720 Business Park Blvd Ste 22
Winter Garden, FL 34787

Old Man Mountain Sherpa Pannier Rack for Catrike

PART LIST

- 1 Sherpa Rack (bottom mounting brackets attached)
- 2 Flat brackets
- 2 L brackets
- 2 1" clamps
- 6 M6 bolts
- 12 M6 washers
- 6 M6 Lock nuts
- 2 M5x15 cap screws




INSTALLATION:

1. Resting the rack on the ground, line up the holes in the bottom mounting brackets (already attached to the trike) with the threaded holes located farthest back on the dropouts.
2. Using the M5x15 screws, loosely attach the rack to the dropouts.
3. place, leveling it. Tighten the M5x15 screws just tight enough to hold it in place as you work.
4. Put the 1" rubber coated clamps around the top horizontal seat tube with the tabs with the screw holes towards the bottom of the tube.



NOTE: SPEED models - Putting the clamp on so that the tabs are towards the top of the tube will result in a less severe angle for your flat brackets.

5. On the sides of the rack there are horizontal bars with slots in them. Attach the L brackets to the inside of the front slots on either side of the trike using M6 screws. Leave the bracket loose enough to rotate a little.

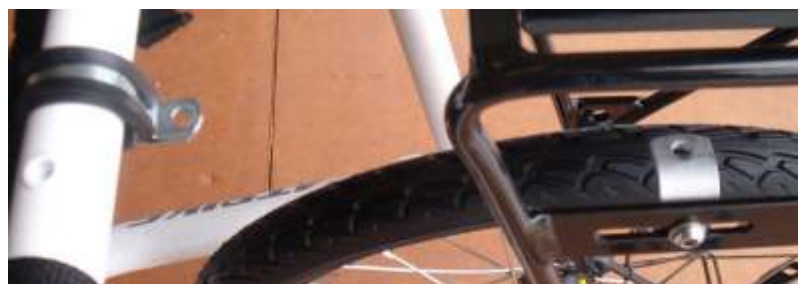

6. Attach the hole end of the flat bracket to the 1" clamp on the horizontal seat tube with an M6 screw.



7. You can now attach the slotted end of the flat bracket to the L bracket with an M6 screw. Simply rotate the L bracket and 1" clamp to the same angle as the flat bracket. You may also want to adjust the position of the 1" clamps at this time if the flat brackets are crooked.



NOTE: the angle of your brackets will vary depending on your model trike. See pictures at end of instructions.

8. Make sure your rack is still level and you're ready to tighten everything down and go for a ride!

Sherpa on a Catrike Road:



Sherpa on Catrike Pocket:



Sherpa on Catrike Speed:

